




TOPCon

Bifacial



**JAPANESE
TECHNOLOGY**
認定された日本の技術と仕上がり

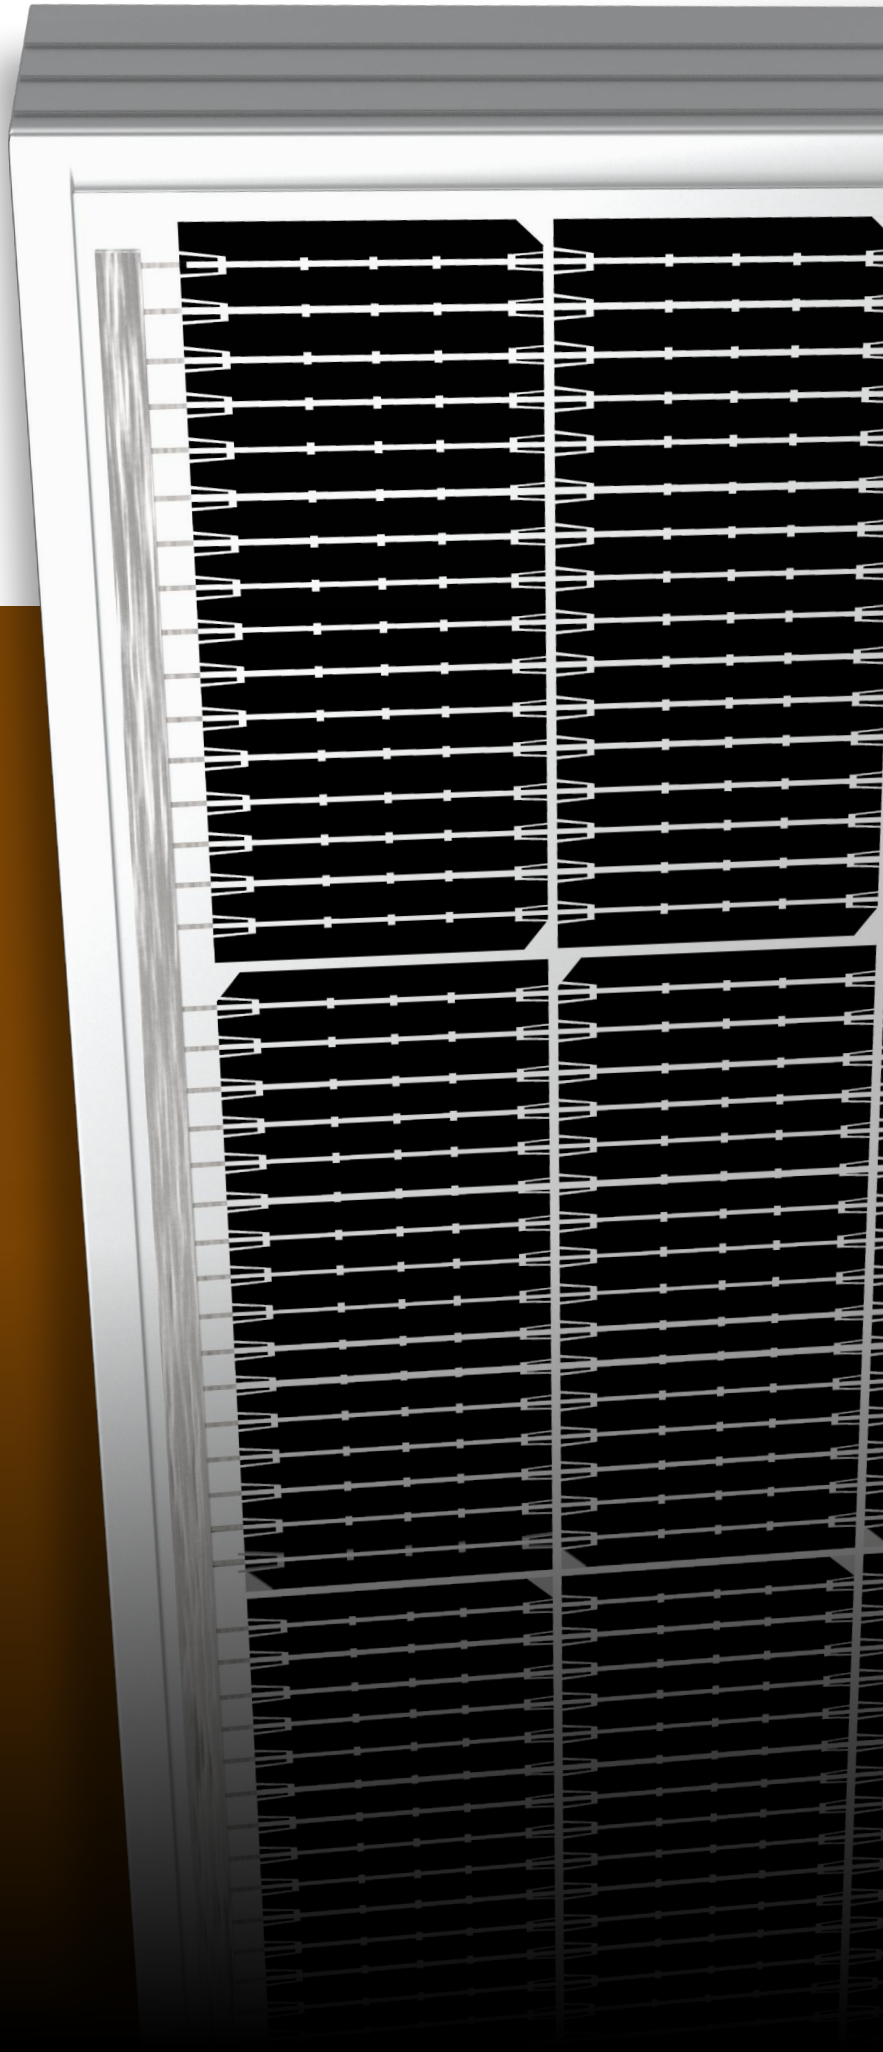

N-Type MBB Cell

New circuit designed N-Type cells can increase the output power of 10W~20W



Bifacial With Dual Glass

Module adopts 182*182mm half cells, bifacial module provide an additional 5%~25% output.



Harsh Environment Adaptability

Strict salt spray and ammonia corrosion test by TUV Nord.



PID Protection

Ensure the attenuation probability caused by PID phenomenon is minimized.



Load Capacity

Mechanical load tests including wind load 2400 PA and snow load 5400 PA done by TUV Nord.




Low Light Features

Higher performance under low light environment.


Rated Power

565W-590W


CROWN N-TYPE MONO BLUEPRINT

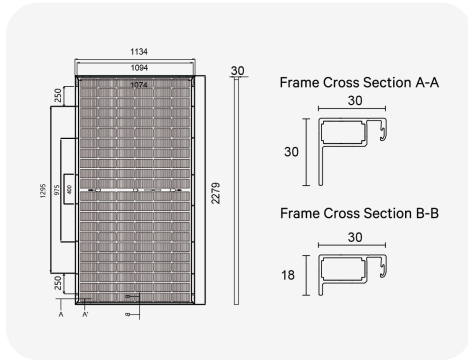

MAXIMUM POWER AND VOLTAGE CHARTS

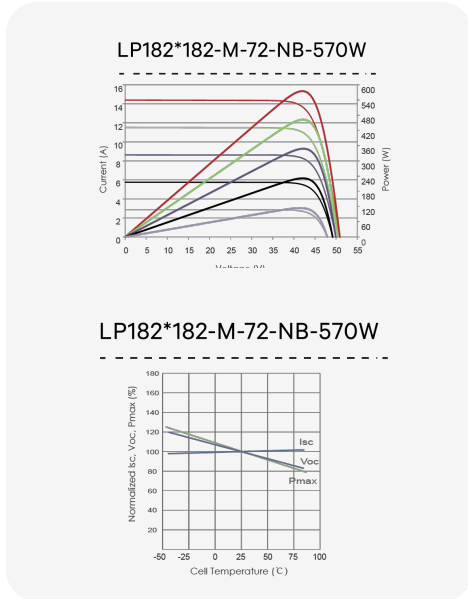

POWER GUARANTEE FOR 30 YEARS

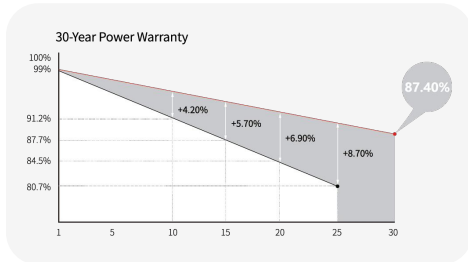

PACKING CONFIGURATION

Modules/Pallet	36 Pieces
Packing Description	20 Pallets, Total = 720 Modules

TEMPERATURE CHARACTERISTICS

NMOT	41±3°C
Temp Coefficient of VOC	-0.25%/°C
Temp Coefficient of ISC	+0.046%/°C
Temp Coefficient of Pmax	-0.30%/°C

ELECTRICAL PARAMETERS AT STC

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C

Power	565W	570W	575W	580W	585W	590W
Open Circuit Voltage	51.12V	51.27V	51.42V	51.57V	51.72V	51.8V
Short Circuit Current	13.99A	14.05A	14.11A	14.18A	14.24A	14.26A
Maximum Power Voltage	42.04V	42.19V	42.34V	42.49V	42.64V	44.0V
Maximum Power Current	13.44A	13.51A	13.58A	13.65A	13.72A	13.41A
Module Efficiency	21.86%	22.06%	22.25%	22.44%	22.64%	22.84%

ELECTRICAL PARAMETERS AT NMOT

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

Power	425W	429W	433W	437W	440W	444W
Open Circuit Voltage	48.54V	48.69V	48.84V	48.99V	49.14V	49.2V
Short Circuit Current	11.28A	11.32A	11.35A	11.40A	11.42A	11.51A
Maximum Power Voltage	39.21V	39.36V	39.51V	39.66V	39.82V	41.8V
Maximum Power Current	10.84A	10.90A	10.96A	11.02A	11.05A	11.09A

ELECTRICAL PARAMETERS AT 10% BIFACIAL POWER OUTPUT

Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

Output Power	622W	627W	633W	638W	644W	649W
Open Circuit Voltage	51.12V	51.27V	51.42V	51.57V	51.72V	51.80V
Short Circuit Current	15.50A	15.56A	15.64A	15.69A	15.77A	15.84A
Maximum Power Voltage	42.03V	42.17V	42.34V	42.48V	42.62V	44.00V
Maximum Power Current	14.80A	14.87A	14.95A	15.02A	15.11A	15.18A

SPECIFICATIONS

Weight	32kg
Dimensions	2279mm*1134mm*30mm
Cell Dimensions	182*182mm
Cell Amount	72*2 pcs
Maximum System Voltage	1500V
Junctions Box	IP68
Frame	Aluminum Alloy
Cable	4mm ² , N 1400mm/P 1400mm for Horizontal Installation 4mm ² , N 300mm/P 300mm for Vertical Installation
Connector	MC4 Compatible
Front glass	2.0mm, Anti-Reflection Coating
Back glass	2.0mm, Heat Strengthened Glass
Application Level	Class A
Bifaciality	80±5%

MAXIMUM RATING

Output Tolerance	0~+5W
Operating Temperature	-40°C~+85°C
Wind Load/Snow Load	2400pa/5400pa
Fuse Current	25A

